


Product Specifications

ThinView-18-RM

18.1" Rack-Mount Flat Panel Monitor

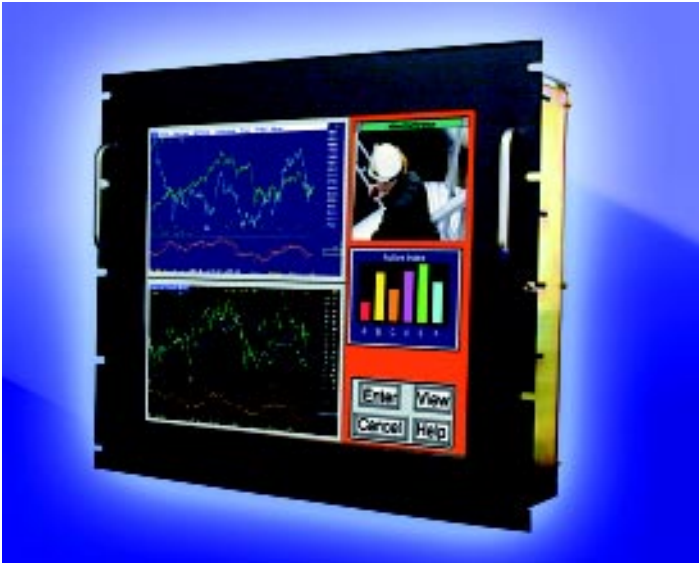

The ThinView-18-RM flat panel monitor with an integrated resistive touchscreen features an 18.1" active matrix color TFT LCD. It has a NEMA 4 rating on the front surface, with the front bezel ready to be rack mounted to your 19" rack-mount equipment. The rack-mount bezel is constructed of powder coated metal with a fingerprint-proof, clear plastic overlay. The anodized aluminum rear cover is vented for heat dissipation and provides protection for all electronics.

The ThinView-18-RM accepts PC-compatible VGA signals from any standard video source. It also features our SmartSize™ capability to display lower resolution images on higher resolution screens, and to handle interlaced, full-motion video and progressively scanned computer graphics.

17" and 15" monitor sizes are also available in rack-mount configurations. See Industrial & OEM Flat Panel Monitors section.

Display Specifications

- Display -SH46 18.1" 1280x1024 16.7M color AMTFT LCD
- Viewing angle -/+85° X and Y axis
- Brightness 235 nit
- Standard input Standard analog RGB - DB15 interface
- Linear expansion Seamless expansion to fill entire screen for NTSC/S-Video/PAL:
640x350
640x400
640x480
800x600
1024x768

Touchscreen Specifications

- Type Analog resistive
- Resolution 4096x4096, >100,000 touchpoints/in.²
- MTBF (Sensor) 35 million touches/spot
- O/S driver Windows 95, 98, 2000, NT
- Stylus All types
- Transmissivity 75%

System Specifications

- Temperature 0° - 50°C (operating);
-25° to 60°C (storage)
- Power 110/220V auto-sensing
- Dimensions 19" x 15.75" x 4.81" (WxHxD)
482.6 mm x 400.05 mm x 122.17 mm
- Weight 19 lbs.

Options

- UHB -H946 Ultra-HiBrite 900 nit or greater display
- Input signals -NTSC NTSC/S-Video/PAL
-SOG Synch-on-Green
-COMP Composite Synch
- Power DC options from 12 - 36 VDC; call for other voltages

Ordering Information

ThinView-18-RM-<Display>-Options



GE Fanuc Embedded Systems Information Center — Greenville Location
Computer Dynamics, 7640 Pelham Road, Greenville, SC 29615
Phone: (864) 627-8800 • Fax: (864) 675-0106 • www.gefanuc.com/ipc

© 2004 GE Fanuc Automation Americas, Inc. All rights reserved. Celeron, Intel and Pentium are registered trademarks of Intel Corporation. Windows is a registered trademark of Microsoft Corporation. All other brands or names are the property of their respective holders. Specifications are subject to change without notice. Reproduction or copying of images is prohibited without the express written permission of GE Fanuc Embedded Systems, Inc.07/04 GFA-429M